


SPECIFICATIONS:

IMPEDANCE: NON CONSTANT
 FREQUENCY RANGE: 0-300 MHz
 WORKING VOLTAGE: 500 V rms max. @ sea level
 FOR RG-58, 58A, 58C, 141, 141A, BELDEN 8240, 9907
 8259, 8262, 9201, 9203, 9310, 9311 & COMM/SCOPE 0268



PART NO.

RFU-504

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	7/21/98	R. RICE
B	CHANGE DWG FORMAT, SPECS, STRIPING & DWG#, WAS 8938	CZS	02/29/08	JDMc

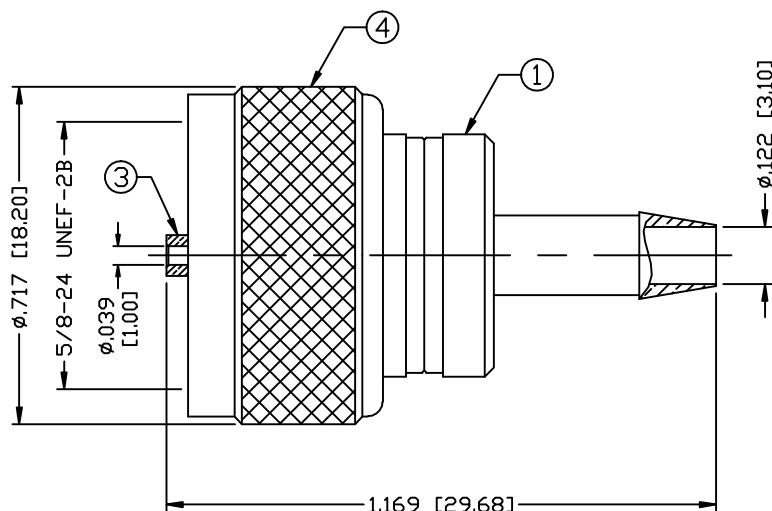

RECOMMENDED CRIMP DIE: .068"

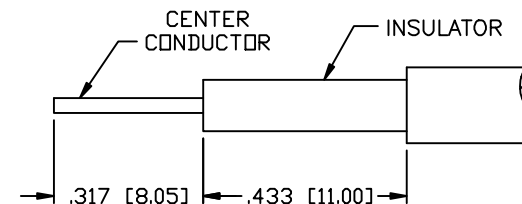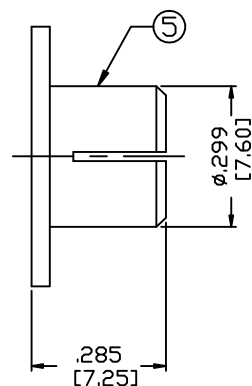

RECOMMENDED STRIPPING DIMENSIONS

1	BODY	1	BRASS	NICKEL, 100μ"
2	INSULATOR	1	DAP	---
3	CONTACT	1	BRASS	SILVER, 80μ"
4	SHELL	1	BRASS	NICKEL, 100μ"
5	FERRULE	1	BRASS	NICKEL, 100μ"
6				
7				
8				
9				
10				
11				
12				
13				
14				

CUSTOMER
OUTLINE DRAWING

ALL DIMENSIONS
ARE REFERENCE ONLY

DRAWN	C. ZUNIGA	02/29/08
CHECKED		
ORJ DRAWN	C. ZUNIGA	7/21/98

R o HS
COMPLIANT

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

UHF PLUG / PL-259
WITH PUSH-ON FERRULE

SIZE	CABLE GROUP	DWG NO.	REV
A	C	RFU-504	B
SCALE:	NTS	ENGINEERING ID 000494	SHEET 1 OF 1